


Abmessungen, Ausführung „R“

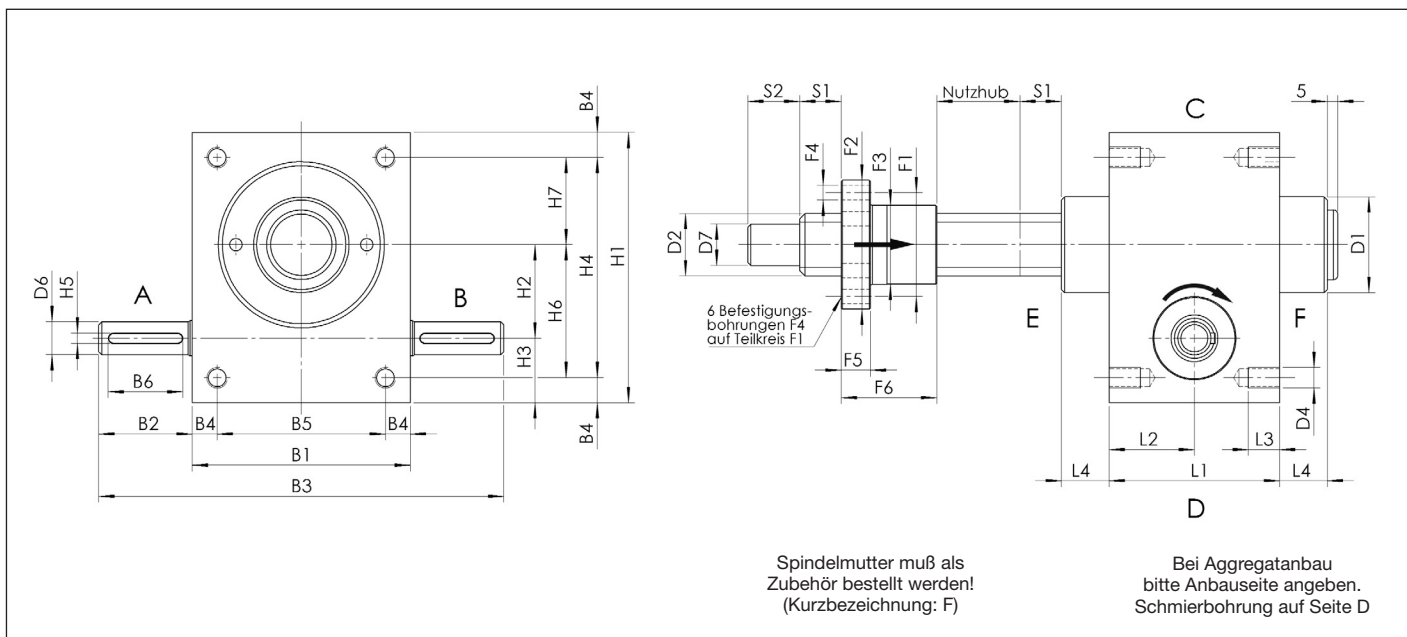

Auf Wunsch auch ohne Hals (D1) am Gehäuseboden lieferbar

Baugröße	Maße [mm]																
	L ₁	L ₂	L ₃	L ₄	B ₁	B ₂	B ₃	B ₄	B ₅	B ₆	H ₁	H ₂	H ₃	H ₄	H ₅ (P ₉)	H ₆	H ₇
NM 0	50	25	12	12	50	21	92	6	38	14	60	20	18	48	3	32	16
NM 1	62	31	13	12	72	24	120	10	52	18	80	25	24	60	3	39	21
NM 2	75	37,5	15	18	85	27,5	140	11	63	20	100	32	28	78	5	49	29
NM 3	82	41	15	23	105	45	195	12	81	36	130	45	31	106	5	64	42
NM 4	117	58,5	16	32	145	47,5	240	15	115	36	180	63	39	150	6	87	63
NM 5	160	80	30	40	165	67,5	300	17	131	56	200	71	46	166	8	100	66
NJ 1	175	87	40	40	195	65	325	20	155	56	210	71	49	170	8	100	70
NJ 2	165	82	45	40	220	67,5	355	25	170	56	240	80	60	190	8	115	75
NJ 3	165	82	45	40	220	67,5	355	25	170	56	240	80	60	190	8	115	75
NJ 4	220	106	54	50	250	65	380	30	190	56	290	100	65	230	10	135	95
NJ 5	266	133	80	60	300	100	500	35	230	90	360	135	75	290	14	175	115

Baugröße	Maße [mm] ¹⁾														
	D ₁	D ₂		D ₄	D ₆ (j ₆)	D ₇ (j ₆)	F ₁	F ₂	F ₃ (h ₉)	F ₄	F ₅	F ₆	S ₁	S ₂	
NM 0	26	14x4	1205	M 6	9	8	38	48	28	6	10	35	10	12	
NM 1	30	18x4	1605	M 8	10	12	38/40	48/53	28	6/4,5	12	44/38	12	15	
NM 2	39	20x4	2005	M 8	14	15	45	55	32	7	12	44	15	20	
NM 3	46	30x6	2505	M10	16	20	50	62	38	7	14	46	20	25	
NM 4	60	40x7	4005/10 ²⁾	M12	20	25	78/68	95/80	63/53	9/7	16	73/59	25	30	
NM 5	85	60x9	5010	M20	25	40	105	125	85	11	18	99	25	45	
NJ 1	90	60x9	—	M24	25	45	105	125	85	11	20	99	25	55	
NJ 2	105	70x10	—	M30	30	55	140	180	95	17	30	100	25	70	
NJ 3	120	80x10	8010	M30	30	60	150/125	190/145	105	17/14	30/22	110/101	25	75	
NJ 4	145	100x10	—	M36	35	80	185	240	130	25	35	130	25	100	
NJ 5	170	120x14	—	M42	48	95	230	300	160	28	40	160	30	120	

¹⁾ Die zweiten Werte beziehen sich auf die Ausführung mit Kugelgewindetrieb (KGT).

²⁾ Bei KGT 4010 entsprechen die Abmessungen der Tr-Mutter (1. Tabellenwert).